
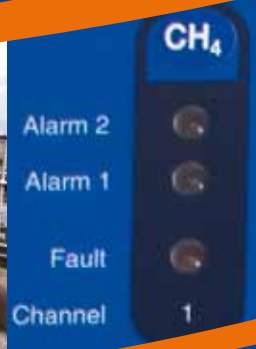


CO₂
H₂S
Cl₂
NH₃
O₃
CO
O₂
CH₄
SO₂
HCL
LPG

Vortex

Gas detection control panel



Vortex

- 1 to 12 channel control system

Vortex Rack

- 19" rack mounted control system

Vortex Panel

- Panel-mounted control system

Vortex FP

- Exd Flameproof control system



Vortex

Vortex is the powerful package that has flexibility built-in.

With up to 12 channels of gas including up to 3 of fire, Vortex can be customised to meet your site requirements, however complex, without the need for extensive cabling.

All this and it is simplicity itself to operate and maintain.

Simple to use

- Vortex offers all the flexibility you will need while still being simple to operate. All the day to day operations can be completed via push buttons on the front panel.
- The display panel shows the fault and alarm levels for all the channels but the LEDs only light when a hazard or fault is detected. Thus the whole system can be checked at a glance.
- Even when there is a need to change the alarm or channel settings all of these adjustments can be made at the enclosure without the need for additional equipment.

Robust & reliable

- You can rely on Vortex because it has been tested to the highest environmental standards. It is rated IP65 for dust and water ingress.
- Not only does it meet all the current legislation, but it also has been designed to meet the latest gas detection EMC standards.
- For your safety all the relays are monitored continuously: coil faults are identified immediately ensuring system integrity.
- Power failures are not a problem as Vortex has its own internal battery back-up which is monitored continuously for connection integrity and charge levels.
- Vortex has been validated to the functional safety standard IEC 61508 (SIL 1).

Ultimate flexibility

- Vortex can be configured to match all of your site requirements, whatever they may be, with an absolute minimum of wiring.
- Each channel has 1 fault and 3 levels of alarm which can be combined in any pattern: voting, to trigger up to a maximum of 32 output relays.
- Customisation is easy too. It can be factory set to your requirements or altered at any time by a PC using the Vortex PC software. This allows extensive systems to be configured without the need for complex cabling.
- Vortex uses industry standard communication links so it is simple to integrate it with your existing control system.

Easy maintenance

- Vortex has been specially designed to make servicing and maintenance simple and convenient.
- The modular construction means that replacement parts simply plug in.
- Space inside the enclosure has been maximised to improve access for cable termination so that cabling is easy.
- Each zone can be inhibited separately to allow you to work on a specific area without affecting the rest of the system.
- All adjustments are performed electronically thus the problems of drift from adjustable potentiometers has been removed reducing maintenance to a minimum.



Systems Options

In addition to the standard wall-mounted panel, Vortex is also available in modular and hazardous area certified versions. **Vortex Rack** is supplied with a standard 19" display panel and input/output modules, PSU and batteries for fitment within any standard 19" enclosure. **Vortex Panel** is designed for flush-mounting into any door or panel. **Vortex FP** is ATEX certified for use in Zone 1 or Zone 2 hazardous areas, such as on oil production vessels and within industrial analyser shelters.




Vortex

- Proven reliability
- IP65 ingress protection
- RS-485 Modbus Communications




Vortex Rack

- Fits into any 19" enclosure
- Enables multi-rack systems to be created
- Ideal for replacing older 19" systems

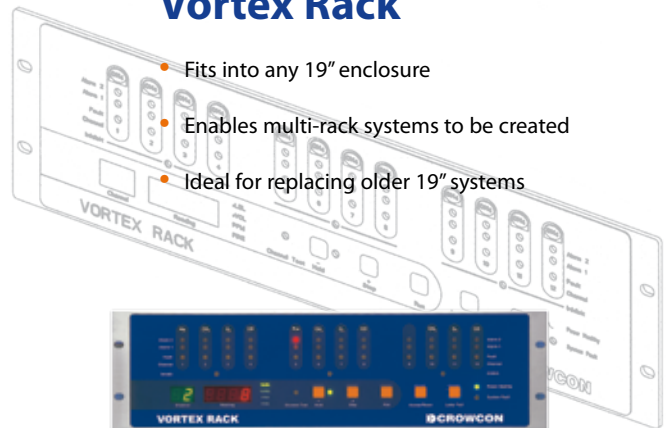

Vortex Panel

- Fits into any panel or door
- Self-adhesive display label provides IP65 ingress protection
- Wide range of PSU and battery options

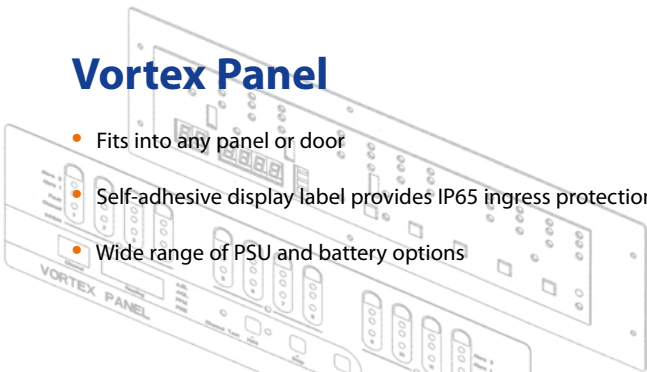

Vortex FP

- ATEX Zone 1 & 2 certified
- Non-intrusive calibration via RS-485 link
- 20 cable entry points as standard



Vortex Specification:

Model		Vortex	Vortex Rack/Panel	Vortex FP
Size		470 x 306 x 170mm (18.5 x 12 x 6.5 ins)	Rack display: standard 19" 3U Panel display: 441 x 128mm (cut-out 366 x 84.5mm) Modules, PSU and batteries are supplied loose for fitting within a cabinet.	440 x 640 x 332mm (17.3 x 25 x 13 ins)
Weight		12Kg (27lbs)	Dependant on configuration	70Kgs (154lbs) approx.
Enclosure material		Back-box: Aluminium Front cover: ABS	Not applicable	LM25 Aluminium with polyester powder coating.
Ingress protection		IP65	Cabinet dependant	IP54, IP66 with application of Hylomar PL32M compound
Channels		Up to 12	Up to 12	Up to 12
Inputs	Gas	2 or 3 wire 4-20mA (sink or source), 0-5V Up to 3 loops Up to 20 devices per loop	As per Vortex	As per Vortex
	Fire –smoke & heat detectors, manual call-points			
Outputs	External audible/visual alarm drive	Via relays, four 24Vdc 0.5A supplies provided.	As per Vortex	Auxiliary DC power terminals provided .
Relays	Type	Up to 24 SPCO, contacts rated 6A @ 250Vac Mains fail, battery low, battery fail	Up to 32 SPCO with bus extension module. Other specifications as per Vortex	As per Vortex
	Assignment – Common	Alarms, faults and system events.		
	Voting	Energised/de-energised, latched/non-latched, time-delayed, pulsed		
	Relay modes			
Digital communications	DCS/PLC/PC Local configuration link	RS-485 Modbus or Profibus RS-232 (configuration software and lead supplied)	As per Vortex	As per Vortex
Logging		Up to 300 alarm, power, fault, system events are stored in NVM.	As per Vortex	As per Vortex
Panel indication	Channel number Gas reading Measurement units Power Battery OK Run/hold indication Channel test mode System fault – integrity watchdog	2-digit 7-segment LED 4-digit 7-segment LED %LEL, ppm, %Vol, Fire Green LED Green LED Green LED Flashing Amber LED Amber LED	As per Vortex	As per Vortex Displayed information can be altered and outputs can be inhibited during calibration using a magnetic key.
Alarm indication	Audible – internal sounder Visual – Alarm – Fault – Inhibit	Piezo Level 1 & 2, Red LED Per channel, Amber LED Per zone, Amber LED	As per Vortex	As per Vortex
Power	AC mains DC Battery back-up	110/120V & 220/240Vac (switchable) 50-60hz 20-30Vdc 2Ah internal	As per Vortex	110/120V & 220/240Vac (switchable) 50-60hz 20-30Vdc Battery back-up not available
Approvals	Low Voltage Directive EMC Hazardous area	EN61010-1 EN50270, FCC, ICES N/A	EN61010-1 EN50270, FCC, ICES N/A	EN61010-1 EN50270, FCC, ICES ATEX Ex II 2G
Operating Temperature		-10 to +40°C (14 to 104°F)	As per Vortex	As per Vortex
Humidity		0-95%RH non-condensing	As per Vortex	As per Vortex
Functional safety		Validated to IEC61508	Validated to IEC61508	Validated to IEC61508

Compatible Detectors

Gas Detectors



Open Path Gas Detectors



Flame Detectors



Smoke and Heat Detectors



A HALMA COMPANY

UK: 2 Blacklands Way, Abingdon Business Park, Abingdon, OXON, OX14 1DY
+44 (0) 1235 557700 sales@crowcon.com

US: 21 Kenton Lands Road, Erlanger, Kentucky 41018-1845
+1 859 957 1039 salesusa@crowcon.com

NL: Vlambloem 129, 3068JG, Rotterdam
+31 10 421 1232 eu@crowcon.com

SG: Block 194 Pandan Loop, #06-20 Pantech Industrial Complex, Singapore, 128383
+65 6745 2936 sales@crowcon.com.sg

www.crowcon.com

P05005GB Issue 7 March 2010

Area reserved for distributor stamp

CROWCON
Gas Detection You Can Trust